


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101020

proposal

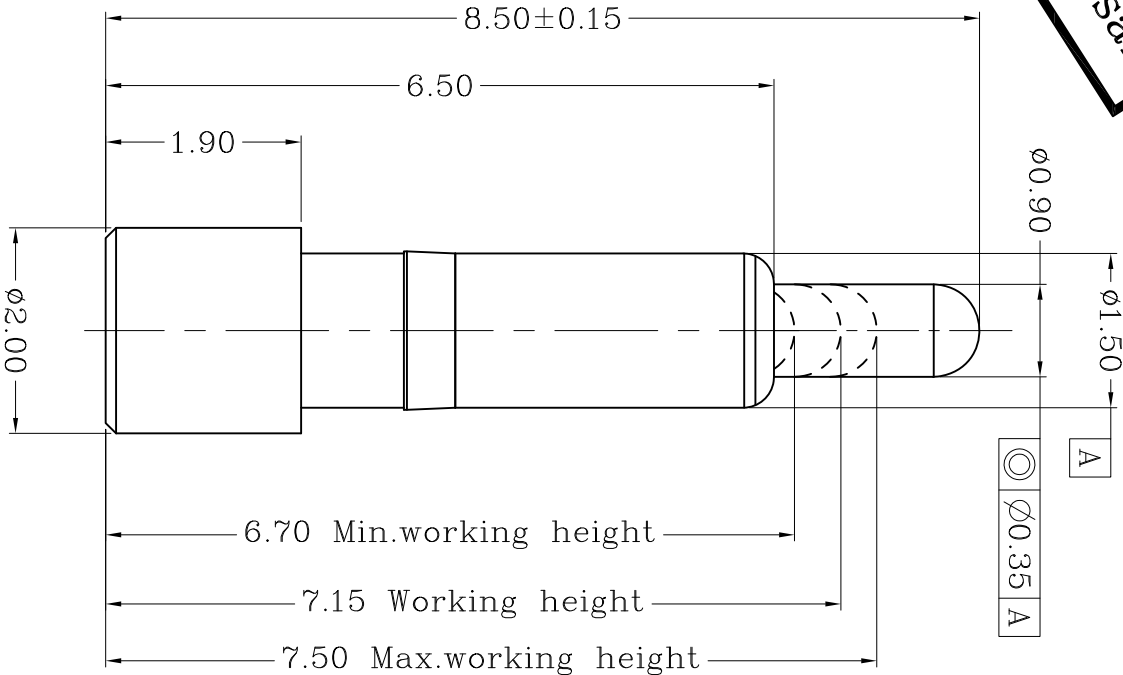

Item	Part name	Qty/Ea	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	
4				
5				

Table 1 Mechanical performance

Working height	7.15mm	168±25gf <2.1>
Durability	10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 The force is the average of forces obtained when plunger goes downwards and upwards.
- 4 <2.1>Warning: Working height are not permitted to be less than Min working height.
- 5 Electrical performance
- 6 Resistance: 30mOhm Max.
- 7 Current rating: 2.0A
- 8 RoHS compliant.

TOP-LINK

Top-Link Electronics Ltd.		Type	Unit		Weight	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm		_____	
DWN: Cai wonlu		APVD:			PART NUMBER	
CHK: REL:				101020-1		
Name POGO PIN				Electronics Top-Link Electronics Ltd.		
Scale 1:1		Size A4	DWG No.	C-101020	Page 1/1	Rev. B1
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.						