


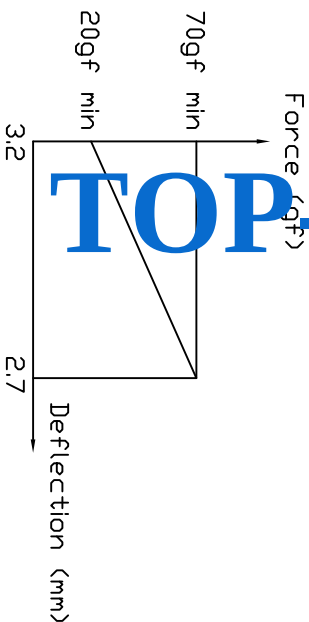


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

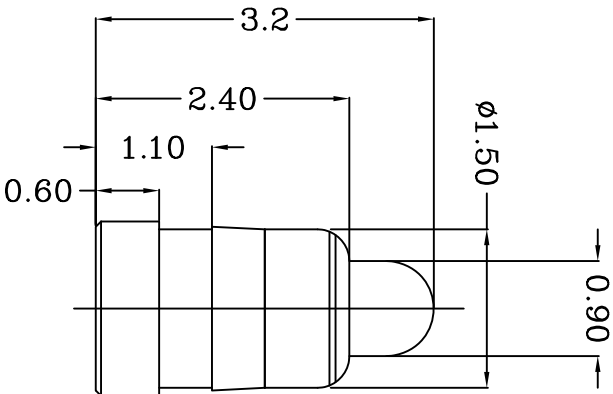

DWG NO.  
C-101022

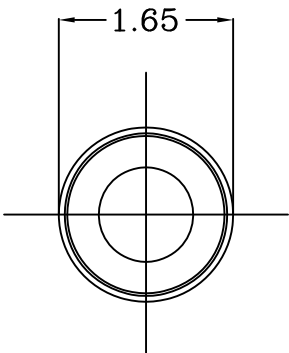

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2.
  - 2)Spring : Stainless steel wire
  - 2 Plating
    - 1)Body: 1.4um Gold plating over 1.4um Nickle plating
    - 2)Plunger: 0.4um Gold plating over 1.4um Nickle plating
  - 3 Electric
    - 1)Contact resistance: 30mOhm Max.
    - 2)Operating voltage: 36VDC Max.

USED DN

101022-1

PART NUMBER

*Top-Link*  
Electronics  
Top-Link  
Electronics Ltd.

| MATL  | HT       | TR                   | FIN      |
|-------|----------|----------------------|----------|
| DWN   | APVD     | REL                  | FIN      |
| CHK   | REL      | REL                  | FIN      |
| NAME  | POGO PIN | PG-165-06-15-2-4-3-2 | FIN      |
| SCALE | A4       | DWG NO.              | C-101022 |
| 1:1   | A4       | DWG NO.              | C-101022 |

DIMENSIONS IN MM  
TOLERANCES UNLESS  
OTHER SPECIFIED  
0 = ±  
0.0 = ±0.15  
0.00 = ±0.10  
0.000 = ±  
ANGLE: ±1°  
SURF TEXTURE: 3.2/  
REMOVE BURRS, BREAK  
SHARP EDGES R0.05 MAX  
DO NOT SCALE PRINT

|     | Update remark      |      | 2007/09/14 |
|-----|--------------------|------|------------|
| LTR | REVISION<br>RECORD | APVD | DATE       |

| LDC  |
|------|
| -    |
| DIST |
| -    |

4

3

2

1