



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
101025-1

LDC
-
DIST
-

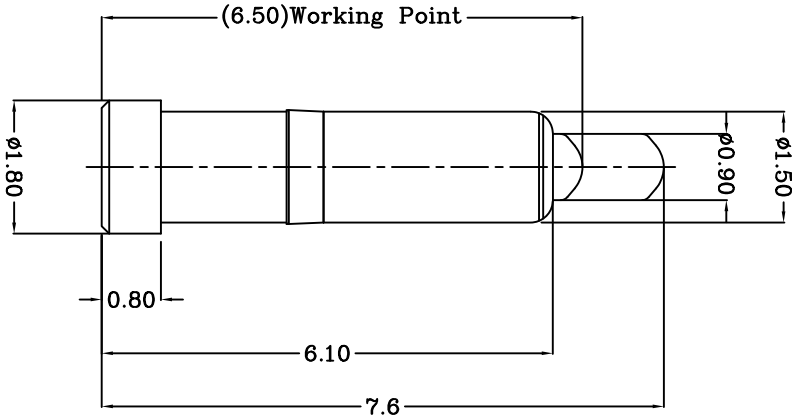

TOP-LINK

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)

or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.25um Nickel plating

2)Plunger: Min 0.4um Gold plating over min. 1.25um Nickel plating

3 Mechanical


1)Total stroke : 1.3mm

2)Durability: 10,000 cycle min.

Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

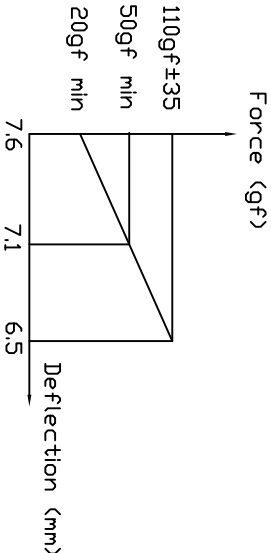

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.10		
0.00	= ± -		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			

MATL		HT TR		FIN	
DWN	1	—	—	—	✓
Benny		APVD	Lansing		
CHK		REL			
Andy					
POGO PIN					
PG-2.0-0.8-1.5-7.6					
101025-1					
PART NUMBER					
101025-1					
Top-Link Electronics Ltd.					

USED ON

-