
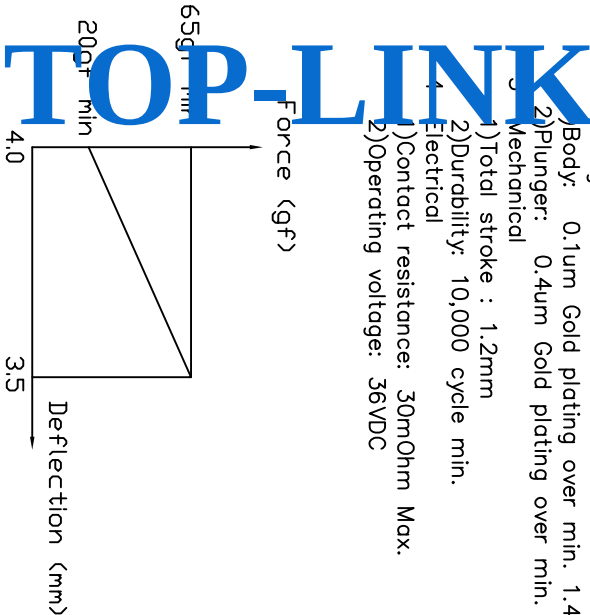


DWG NO.
C-101030

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC
-
DIST
-

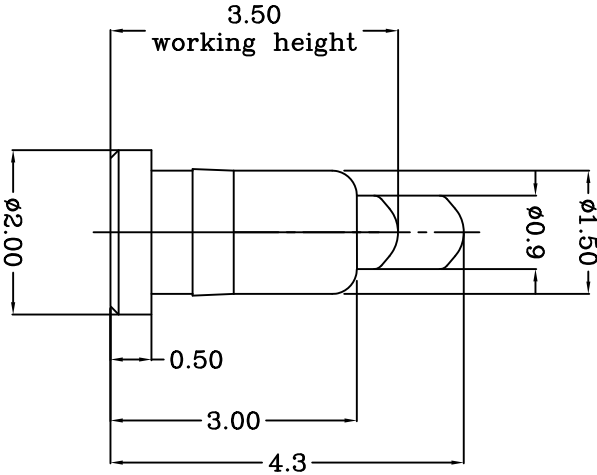

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2 or CuZn36(C2700).
- 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: 0.1um Gold plating over min. 1.4um Nickel plating
2)Plunger: 0.4um Gold plating over min. 1.4um Nickel plating
- 2 Mechanical
- 1)Total stroke : 1.2mm
2)Durability: 10,000 cycle min.
- 1)Electrical
2)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

update remark		REV/DATE
REVISION	APVD	DATE
RECORD		
LTR		

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 3.2/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN		APVD	
CHK		REL	
NAME	PGGD PIN		
SCALE	1:1	A4	DWG NO.
			C-101030
			PG-2.0-0.5-1.5-4.3
			Top-Link Electronics Ltd.
			101030-1
			PART NUMBER
			FIN
			1 OF 1
			SHEET
			REV D

USED DN

-