



DWG NO.
101040

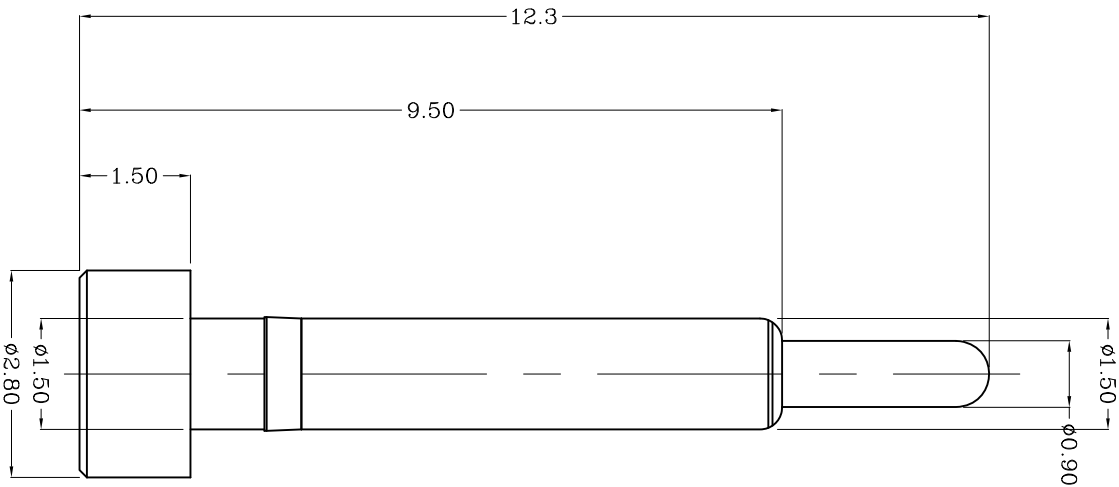

TOP-LINK

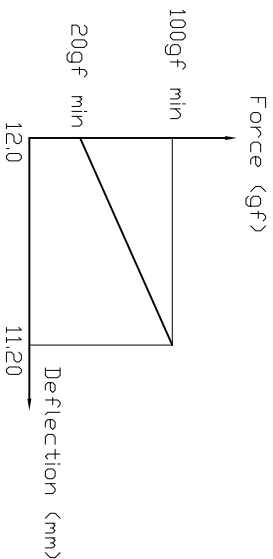

Notes:  Material:

Material:

1)Plunger & Body : CuZn36 Pb3, HO2 (C36000)

or CuZn₃₉ PB3 or CuZn₃₈ PB2 or CuZn₃₆(C2700).

2) Sprin

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: Min 0.4um Gold plating over min. 2.5um Nickle plating

3 Mechanical

1) Total stroke : 2.5mm

2)Durability: 10,000 cycle min.

4 Electrical

1) Contact resistance: 30mOhm Max.

2) Operating voltage: 36VDC

[illegible]

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL	HT TR	FIN
0 = $\pm$	0.0 = ± 0.15	1	—	— ✓
0.00 = ± 0.10	0.000 = $\pm$			
ANGLE: $\pm 1^\circ$				
SURF TEXTURE: $3.2/\sqrt{\text{in}}$		NAME		
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX		PGGD PIN		
DO NOT SCALE PRINT		SCALE	A4	DWG NO.
		1:1	101040	SHEET 1 OF 1
		REV A		

101040-1
PART NUMBER

USED ON