



DWG NO.
C-101043-1

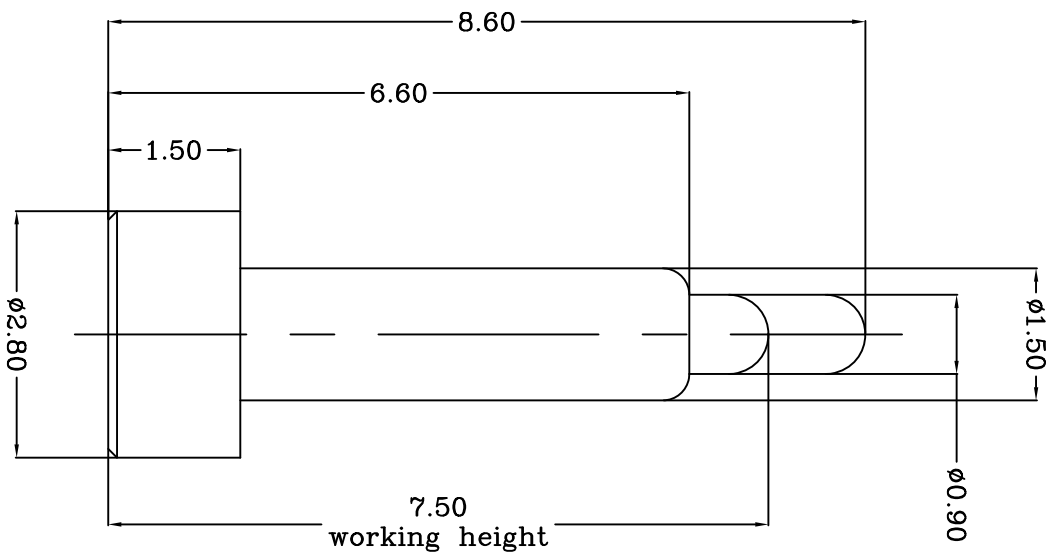

TOP-LINK

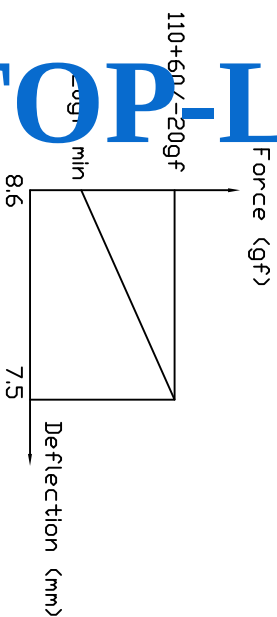

Notes: Mat

Material: 

1)Plunger & Body : CuZn36 Pb3, HO2 (C36000)

or CuZn₃₉ PB3 or CuZn₃₈ PB2.

2) Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: Min 0.4um Gold plating over min. 2.5um Nickle plating

3 Mechanical

1) Total stroke : 2.0mm

2)Durability: 10.000 cycle min.

4 Electrical

1) Contact resistance: 30mOhm Max

1) Contact resistance: 30mOhm Max.
2) Operating voltage: 36VDC

	NEW		2007/04/05
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATERIAL		HT TR		FIN	
0 = ± 0.0 = ±0.10 0.00 = ±0.10 0.000 = ± ANGLE: ±1°		DWN Benny		APVD Lensing		Top-Link Electronics	
SURF TEXTURE: 32/ REMOVE BURRS, BREAK SHARP EDGES, ROUNDS MAX DO NOT SCALE PRINT		NAME		PGGD PIN		Top-Link Electronics L.td.	
SCALE		A4		DWG NO.		SHEET 1 OF 1	
1:1		A4		C-101043-1		REV A	

USED ON

1