
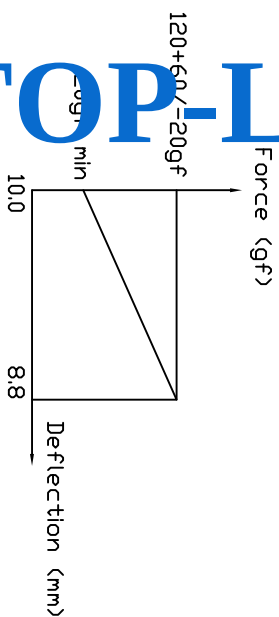


DWG NO.
C-101044

	NEW		2007/04/05
LTR	REVISION RECORD	APVD	DATE

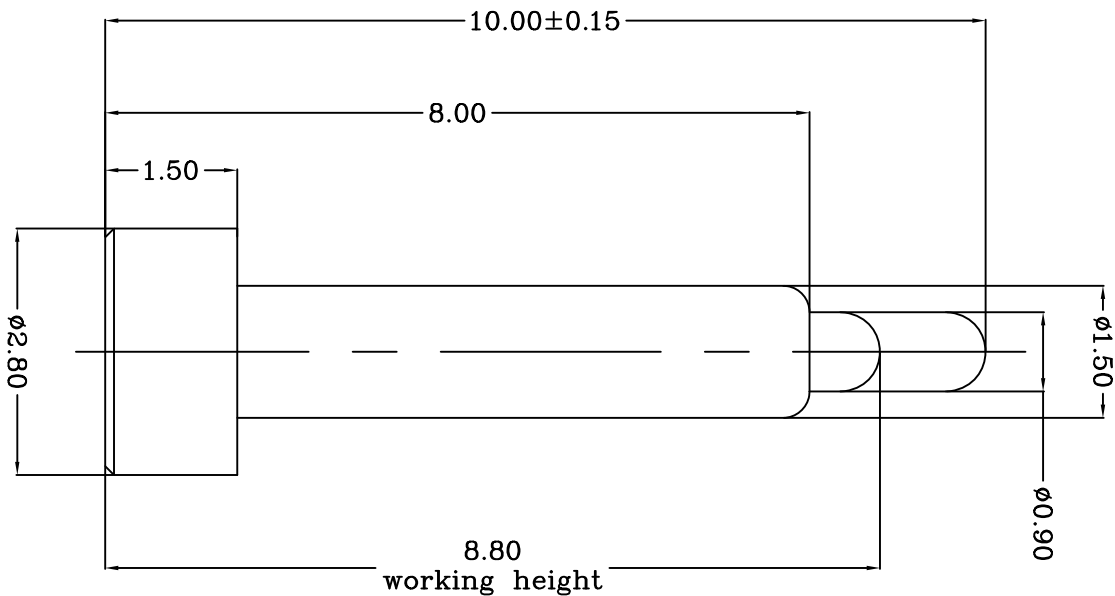

TOP-LINK

Notes:
 ⚠ Material:

Material:

1)Plunger & Body : CuZn36 Pb3, HO2 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2) Spring : Stainless steel wire

2 Plating

- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
- 2) Plunger: Min 0.4um Gold plating over min. 2.5um Nickle plating

3 Mechanical

1) Total stroke : 1.80mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2) Operating voltage: 36VDC

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATL		HT TR	—	FIN	— 
0	= ±			DVN		APVD			
0.0	= ±0.10			Benny		Lensing			
0.00	= ±0.10			CHK		REL			
0.000	= ±			Andy					
ANGLE: ±1°									
SURF. TEXTURE: 32/ 									
REMOVE BURS, BREAK SHARP EDGES, R0.05 MAX									
DO NOT SCALE PRINT									
NAME				PGGD PIN					
SCALE				PG-2.8-1.5-10.0H					
1:1				A4		DWG NO.		C-101044	
				SHEET		1 OF 1		REV	
								A	
									

101044-1
PART NUMBER

USED ON

1