

DIST

DIST

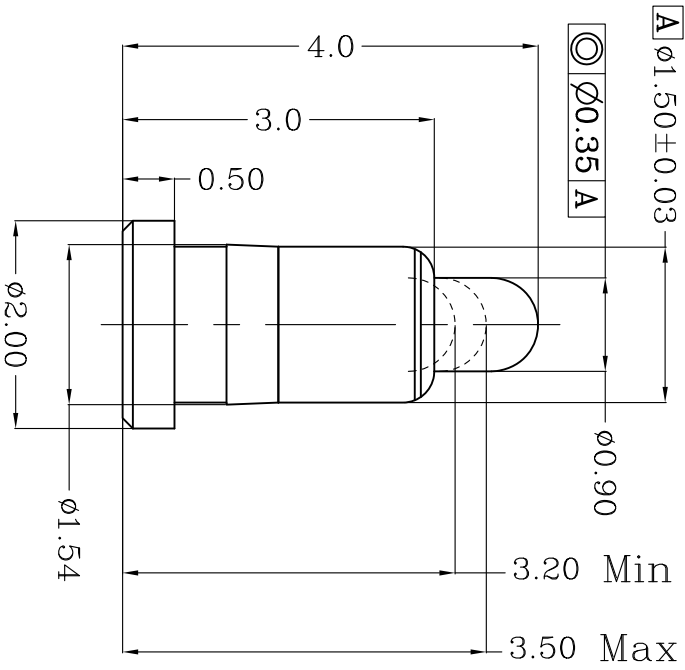


Table 1 Mechanical performance			
Max working height	3.50mm	110±25gf <2.1>	
Min working height	3.20mm	140±35	
Durability	10000cycle		

- Not
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2> Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.
 - Current rating: 2.0A
 - 4 RoHS compliant.

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Rev.	Revision record.	Date.
	NEW	2011/05/23
	Renewal	2011/08/02

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm		Weight			
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin zuozhong		APVD:	<i>top-Link</i> <i>Electronics</i> Top-Link Electronics Ltd.				
0.0 = ±0.15		CHK:								
0.00 = ±0.10										
0.000 = ±0.005										
Angle: ±1°										
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX/DO NOT SCALE PRINT.		Name		POGO PIN						
Scale		1:1	Size	A4	DWG No.	C-101046	Page	1/1	Rev.	C

101046-1
PART NUMBER

Top-Link Electronics Ltd.