



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101047-1

LDC
-
DIST
-

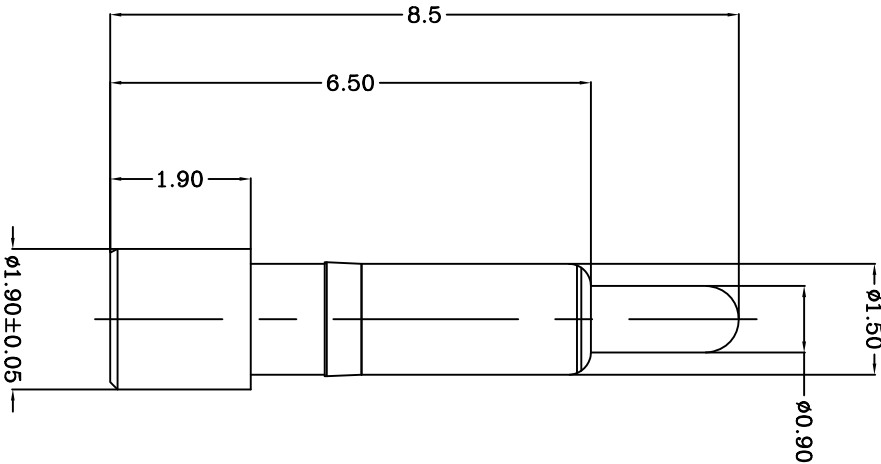

TOP-LINK

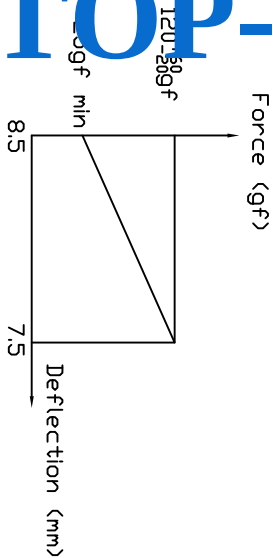

Notes:

- Material:
- Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2.
 - Spring : Stainless steel wire
 - Plating
 - Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
 - Plunger: Min 0.4um Gold plating over min. 2.5um Nickle plating
 - Electrical
 - Contact resistance: 30mOhm Max.
 - Operating voltage: 36VDC MAX.

USED ON

-

	改底部直径公差		0007/10/23
	NEW		0007/04/18
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -			0.0	= ±0.15		
0.00	= ±0.10			0.000	= ±		
0.000	= ±			ANGLE: ±1°			
SURF TEXTURE: 32/				REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT				SCALE 1:1			
MATERIAL				HT TR			
DWN Benny				APVD Lansing			
CHK Andy				REL			
NAME				POGO PIN			
PG-1.9-1.9-1.5-8.5				DWG NO. C-101047-1			
SCALE				SHEET 1 OF 1			
A4				REV A			

PART NUMBER

101047-1

Top-Link Electronics Ltd.