




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101048

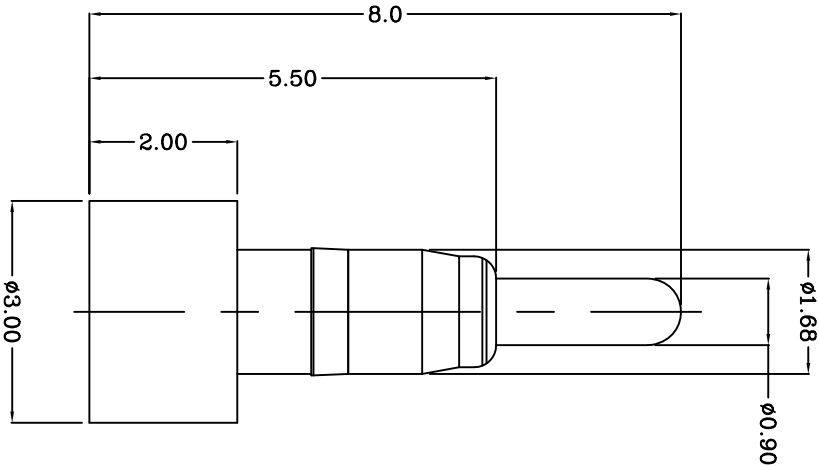

TOP-LINK

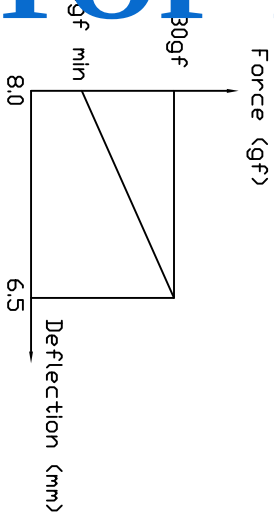

- Notes:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2.
 - 2)Spring : Stainless steel wire
 - 3)Plating
 - 4)Plunger: 0.5um Gold plating over 2.5um Nickle plating
 - 1)Total stroke : 2.5mm
 - 2)Durability: 10,000 cycle min.
 - 1)Electrical
 - 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC MAX.

USED ON

-

101048-1

PART NUMBER

MATL	HT TR	FIN
DWN	—	—
Benny	Lansing	Top-Link Electronics Ltd.
CHK	REL	
Andy		

POGO PIN
PG-3.0-2.0-1.68-8.0

NAME

REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX
DD NOT SCALE PRINT

SCALE	A4	DWG NO.	SHEET	REV
1:1	A4	C-101048	1 OF 1	B

DIMENSIONS IN MM	TOLERANCES UNLESS OTHER SPECIFIED
0	= ± -
0.0	= ± 0.10
0.00	= ± -
0.000	= ±
ANGLE: ±1°	
SURF TEXTURE: 32/	
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX	
DD NOT SCALE PRINT	

DATE	APVD	REVISION	LTR
2007/09/10		update force	

LDC	DIST
-	-

4

3

2

1