


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101056

USED ON

—

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)


or CuZn39 PB3 or CuZn38, PB2 or CuZn36(C2700).

2)Spring : Stainless steel wire


2)Plating

1)Body: 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: 0.4um Gold plating over min. 1.4um Nickle plating

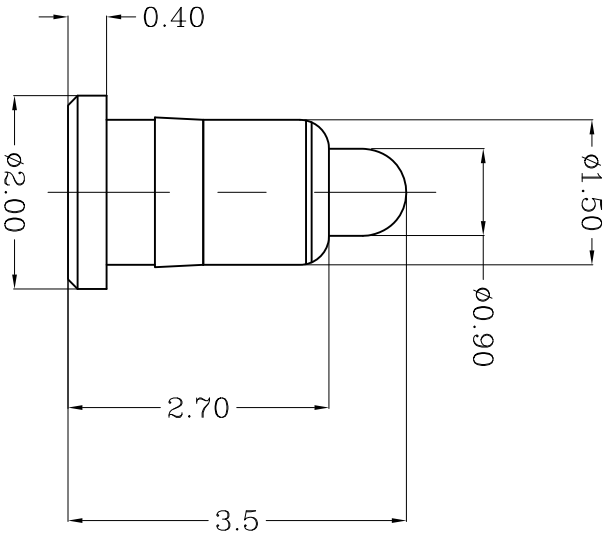

TOP-LINK

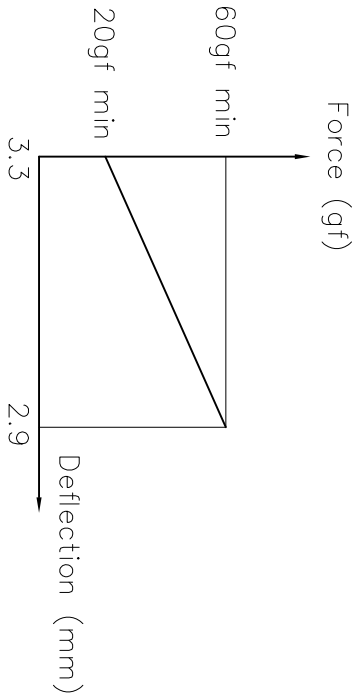

LOC
-
DIST
-

update remark			2007/11/08
REVISION	APVD	DATE	
RECORD			
L TR			

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0 = ±				0.0 = ±0.15			
0.00 = ±				0.000 = ±0.10			
0.000 = ±				ANGLE: ±1°			
SURF TEXTURE: 3.2/				REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT			
MATL		HT TR		FIN			
DWN Benny		APVD Lansing		Top-Link Electronics		Top-Link Electronics Ltd.	
CHK Andy		REL					
NAME		POGO PIN PG-2.0-0.4-1.5-3.5					
SCALE 1:1		A4		DWG NO. C-101056		SHEET 1 OF 1	
						REV	