


DIST

DIST

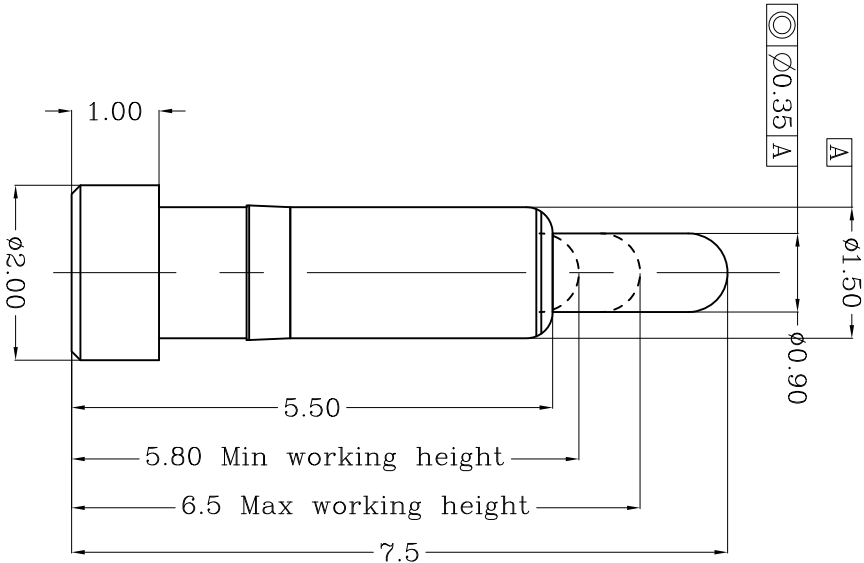

Item	Part name	Qty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um min over Ni 1.4um min
2	Plunger	1	Leaded Brass	Au 0.4um min over Ni 1.4um min
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
Max working height	6.50mm	80gf min<2.1>
Min working height	5.80mm	165±35
Durability	10000cycle	

Not

1 Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.1> The force is the average of forces obtained when plunger goes downwards and upwards.

<2.2> Warning: Working height are not permitted to be less than min working height.

3 Electrical performance

Resistance: 30mOhm Max.

B.1 Current rating: 2.0A

4 RoHS compliant.

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm		101063-1	
0.0	±0.15	DWN:			APVD:	
0.00	±0.10	CHK:			REL:	
0.000	±0.01	Angle:				
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.		Name	POGO PIN			
Scale	Size	DWG No.		Page	Rev.	
1:1	A4	C-101063		1/1	B.1	

Top-Link Electronics Ltd.