


DWG NO.

C-101066

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC
-
DIST
-

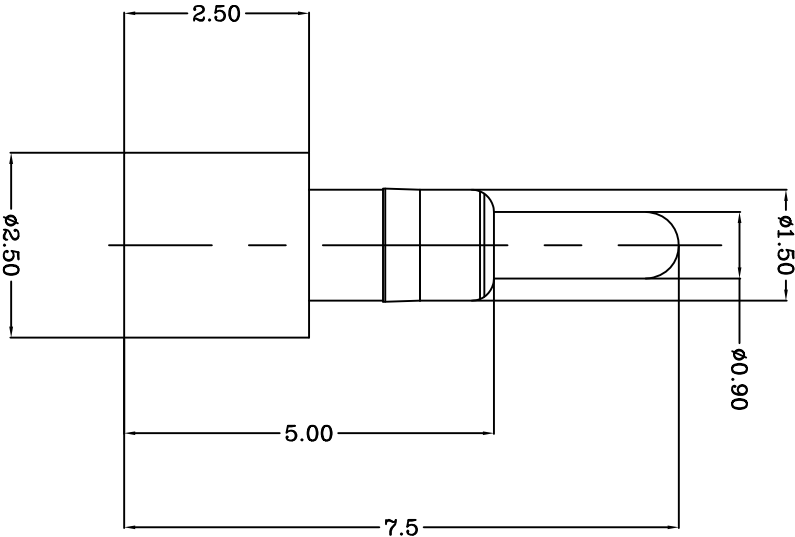

TOP-LINK

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire


2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating

3 Mechanical

Force:135±30gf at 1.0mm stroke

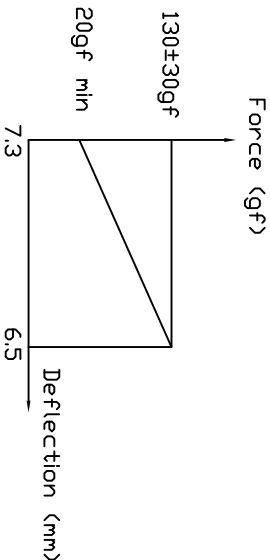

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATERIAL		HT TR		FIN			
								— ✓			
0	= ±-			DVN		APVD		Top-Link Electronics Top-Link Electronics Ltd.			
0.0	= ±0.15			Benny Mo		LANSING					
0.00	= ±0.10			CHK		REL					
0.000	= ±			Andy							
ANGLE: ±1°											
SURF TEXTURE: 3.2/				NAME PGGG PIN PG-2.5-2.5-1.5-5.0-7.5							
REMOVE BURRS, BREAK											
SHARP EDGES R0.05 MAX											
DD NOT SCALE PRINT											
SCALE		A4		DWG NO.		C-101066		SHEET 1 OF 1		REV A	
1:1											