


DWN No.:

C-101076

proposal

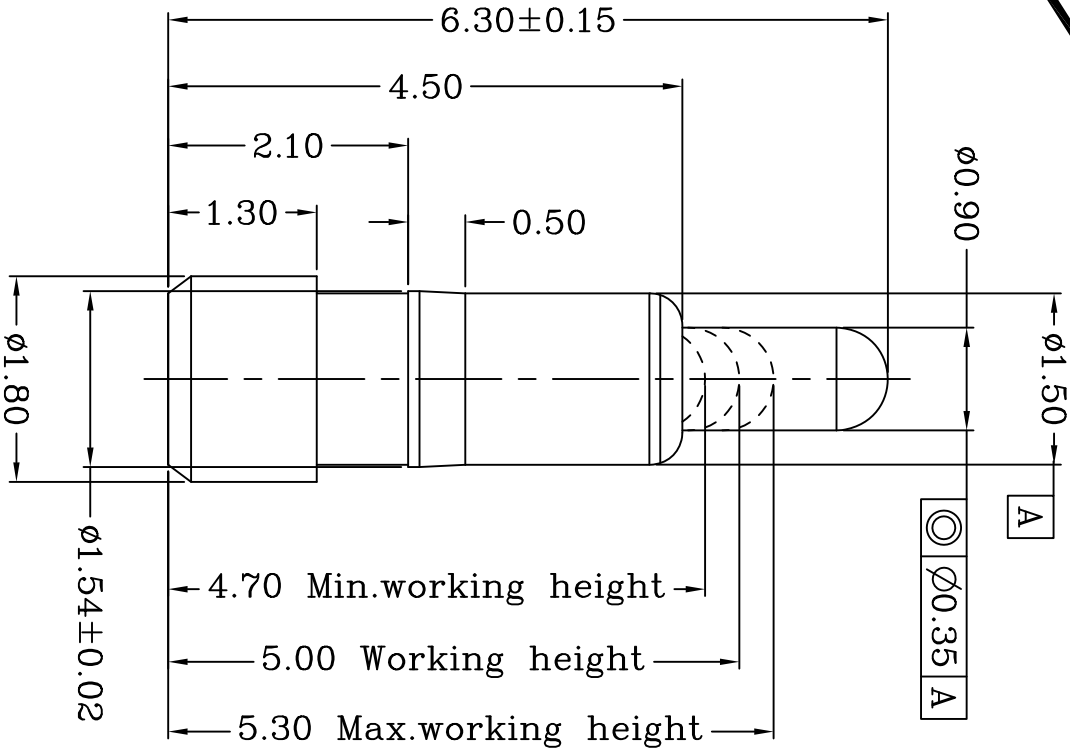

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- 4 RoHS compliant.

Table 1 Mechanical performance

Working height	5.00mm	125±35gf<2.1>
Durability	10000cycle	

Item	Part name	Qty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

C2	Update	2016/07/07
C1	Update	2015/12/26
C	update remark	2007/12/19
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.	Type	Unit	Weight
TOLERANCES UNLESS OTHER SPECIFIED	Customer drawing	mm	
0.0 = ±0.15	DWN: Cai wanlu	APVD:	
0.00 = ±0.10	CHK:	REL:	
0.000 = ±0.05	Name	POGO PIN	
Angle: ±1°	Scale	Size	DWG No.
SURF. TEXTURE: REMOVE BURRS.	1:1	A4	C-101076
BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.			

101076-1
PART NUMBER

A

B

C

D

4

3

2

1