


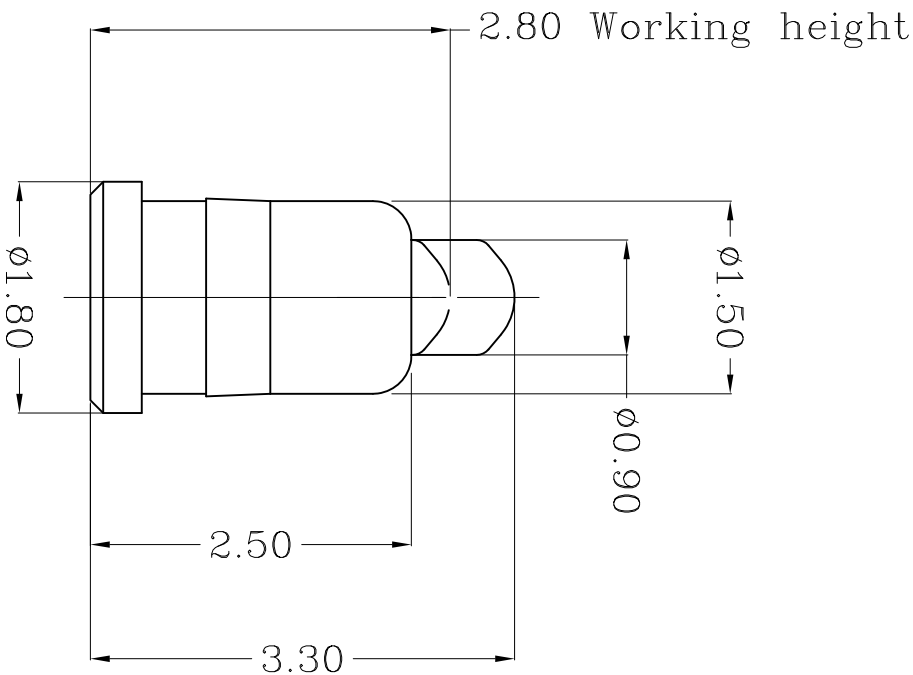

Item	Part name	Q'ty/Ea	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	—————
4				
5				

Table 1 Mechanical performance

Table 1 Mechanical performance		
working height	2.80mm	70gf Min
Durability	10000cycle	

§

1 Dimensions shall be interpreted per ASME Y14.5M.

Mechanical performance(See the table 1)

$\bar{F}$ The force is the average of forces obtained when plunger

goes downwards and upwards.

3 Electrical performance

Resistance: 30mOhm Max.

Current rating: 2.0A

PHS compliant.

TOP LINK

101080-1	PART NUMBER
----------	-------------

Top-Link Electronics Ltd TOLERANCES UNLESS OTHER SPECIFIED 0.0 = ± 0.15 0.00 = ± 0.10 0.000 = ± — Angle: ±1° SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAXXDO NOT SCALE PRINT.	Type	Customer drawing	Unit	mm	Weight	_____			
	DWG:		APVD:		Top-Link Electronics Top-Link Electronics Ltd				
	Cai wanlu		REL:						
	CHK:								
	Name	POGO PIN							
Scale	1:1	Size	A4	DWG No.	C-101080	Page	1/1	Rev.	D1