


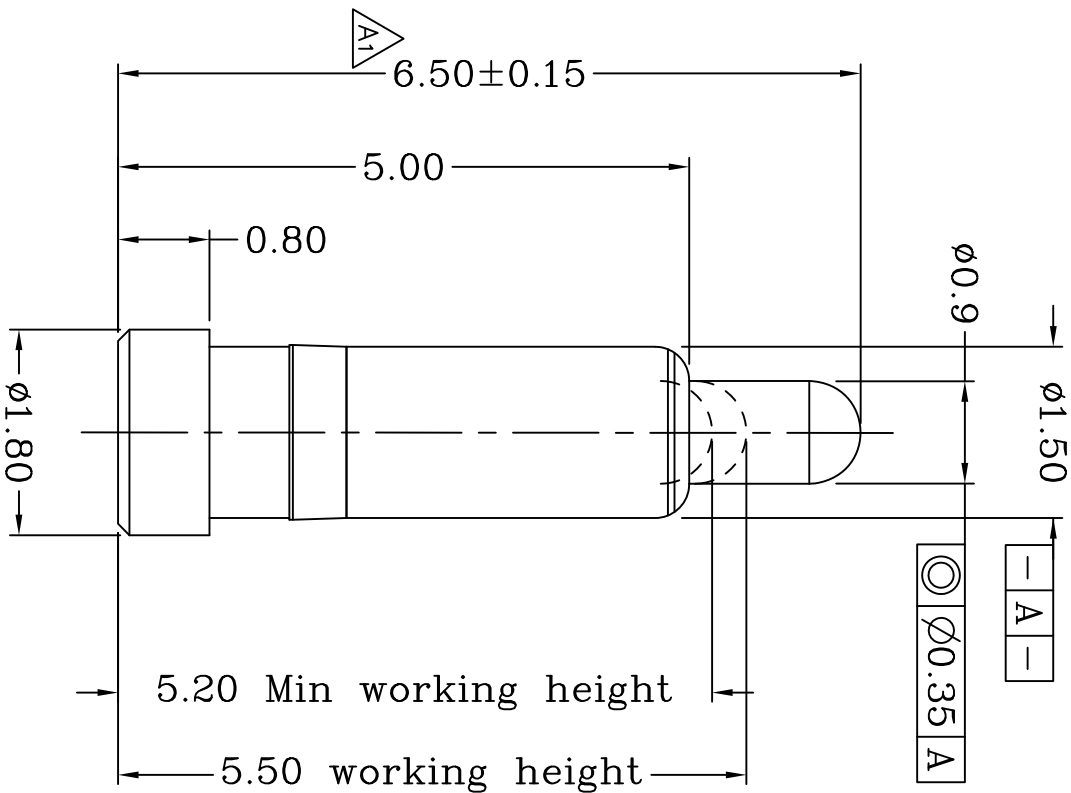

TOP-LINK

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
 <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
 Resistance: 30mOhm Max.
 Current rating: 2.0A
- 4 RoHS compliant.

Table 1 Mechanical performance		
working height	5.50mm	95gf min<2.1>
Durability	10000cycle	

Item	Part name	Qty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.5um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED	DWN:		APVD:		
0.0 = ± 0.15	Col wantu				<i>Top-Link Electronics</i>
0.00 = ± 0.10	CHK:		REL:		Top-Link Electronics Ltd.
0.000 = ± 0.001					
Angle: ±1°	Name	POGO PIN			
SURF. TEXTURE: REMOVE BURRS, BREAK SHARP EDGES	Scale	Size	DWG No.	Page	Rev.
R0.05 MAX/DOT NOT SCALE PRINT.	1:1	A4	C-101083	1/1	A1