



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101110

LDC
-
DIST
-

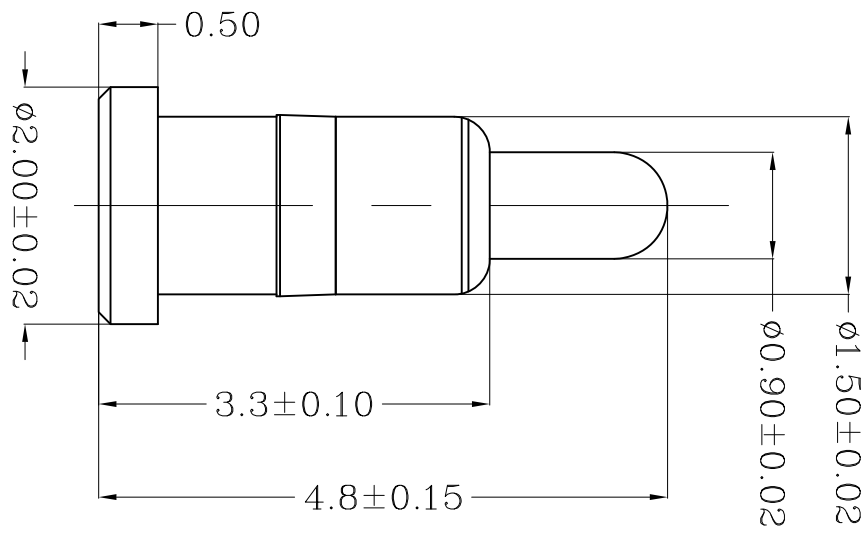

TOP-LINK

Notes:
1)Material:

- 1)Plunger & Body : CuZn36 Pb3, HO2 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
2)Spring : Stainless steel wire
2 Plating
1)Body: 0.1um Gold plating over 1.4um Nickle plating
2)Plunger: 0.4um Gold plating over 1.4um Nickle plating
3 Mechanical
1)Total stroke : 1.2mm
2)Spring Force: 90gf Min. at 1.0mm stroke.
4 Electrical
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC Max.

Revision I			2018/06/07
NEW			2007/09/01
REVISION RECORD	APVD	DATE	
LTR			

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ± 0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 3.2/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	HT TR	FIN	
DWN	APVD		
CHK	REL		
NAME			
PGGD PIN			
PG-2.0-0.5-1.5-3.3-4.8			
SCALE	A4	DWG NO.	C-101110
1:1			
SHEET 1 OF 1			
REV B			

Top-Link
Electronics Ltd.

PART NUMBER

101110-1

USED ON
-