


DWG NO.
C-101134

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

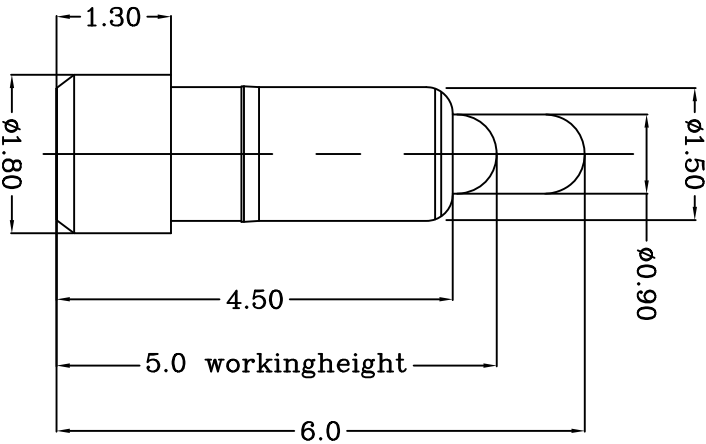

Notes:

△ Material(材质):

1)Body : Brass

2)Plunge : Brass

3)Spring : Stainless steel wire

2 Plating(电镀):

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical(机械性能):

1)Force: 80gf Min per pin at 1.0mm stroke

(力: 下压1.0mm 压力: 80gf Min)

2)Total stroke(总行程) : 1.40mm

3)Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

1)Contact resistance(接触阻抗): 30mOhm Max.

2)Voltage rating(额定电压): 36V DC Max

3)Current rating(额定电流): 2.0A

USED ON

-

101134-1

PART NUMBER

Top-Link
Electronics Ltd.

A

B

C

D

update remark

NEW

2007/12/04

LTR

REVISION
RECORD

APVD

DATE

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT



MATL

DWN
Qin

CHK

NAME

SCALE

1:1

A4

DWG
NO.

C-101134

PGGD PIN

PG-1.8-1.3-1.5-4.5-6.0

SHEET

1 OF 1

REV

B

FIN

-

✓

4

3

2

1