




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101146

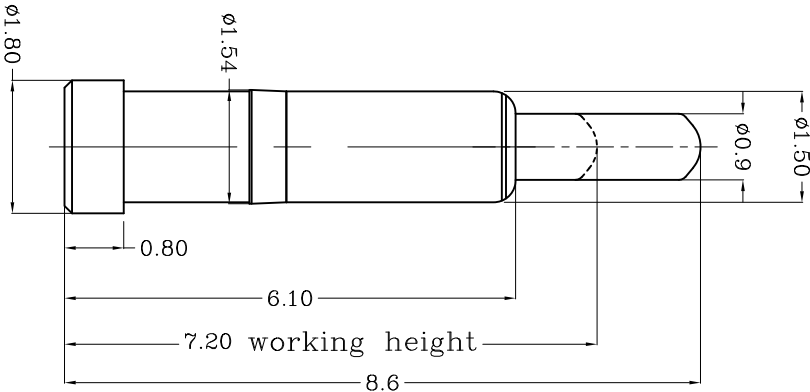

TOP-LINK

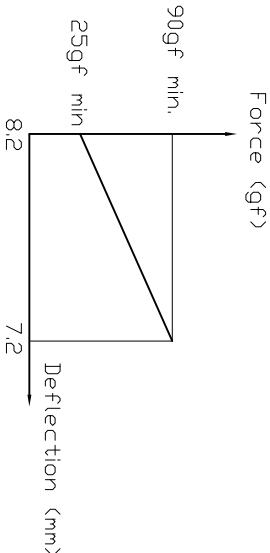

Notes:

Material:

1)Plunger & Body : Brass

2)Spring : Stainless steel wire

2 Plating

1)Body: 0.1um Gold plating over min. 1.4um Nickel plating

2)Plunger: 0.4um Gold plating over min. 1.4um Nickel plating

3 Mechanical

1)Total stroke : 2.3mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

USED ON

-

101146-1

PART NUMBER

A

B

C

D

LDC	-
DIST	-

NEW		0807/12/24
REVISION		
RECORD		
APVD		
DATE		

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.10
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	1	HT TR	-	FIN	-	V
DWN		APVD				
CHK		REL				
NAME	POGO PIN					
SCALE	1:1	A4	DWG NO.	C-101146	SHEET	1 OF 1
					REV	A

Top-Link
Electronics Ltd.