


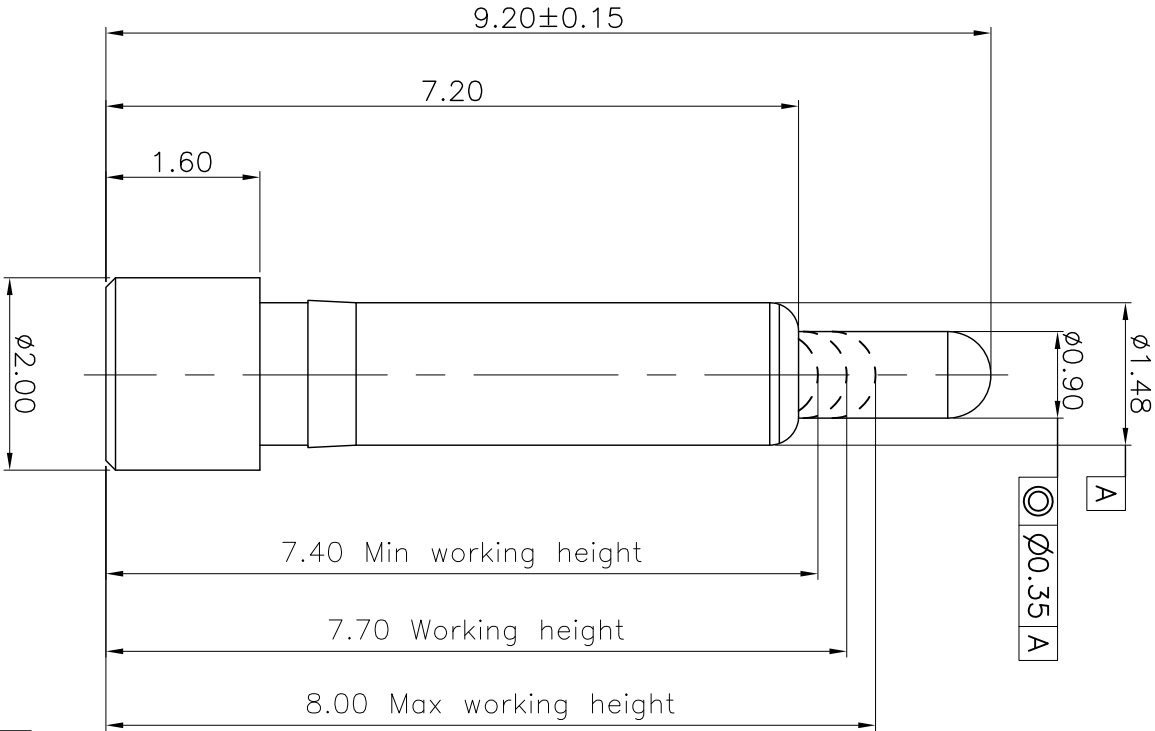

TOP-LINK

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards
 - <2.2>Warning:Working height are not permitted to be less than Min working height
 - 3 Electrical performance
 - <3.1>Current rating: 2.0A
 - <3.2>Voltage rating: 36VAC/DC
 - <3.3>Dynamic Resistance:30mOhm Max (between max and min working height)
 - 4 Environmental performance
 - <4.1> RoHS compliant
 - <4.2>Operating Temperature range:-40°C~+85°C
 - <4.3>Withstanding High Temperature:260°C/10Sec
 - 5 Packaging:Bog.

Table 1:Mechanical performance		
Working Height	7.70mm	155±35gf
Durability	10000 Cycles Min.	

Top-Link Electronics Ltd.			TOLERANCES UNLESS OTHER SPECIFIED		
0. = ± 0.15			0.0 = ± 0.10		
0.000 = ± 0.005			Angle: #1°		
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT.			Type Customer drawing		
DRW: Caiwanlu			APRD:		
CHK:			REL:		
Name Pogo Pin			Unit mm		
Scale 1:1			Size A4		
Part NO. 101147-1			Page 1/1		
Rev: B			Finish		

top-link