



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101148

LDC
-
DIST
-

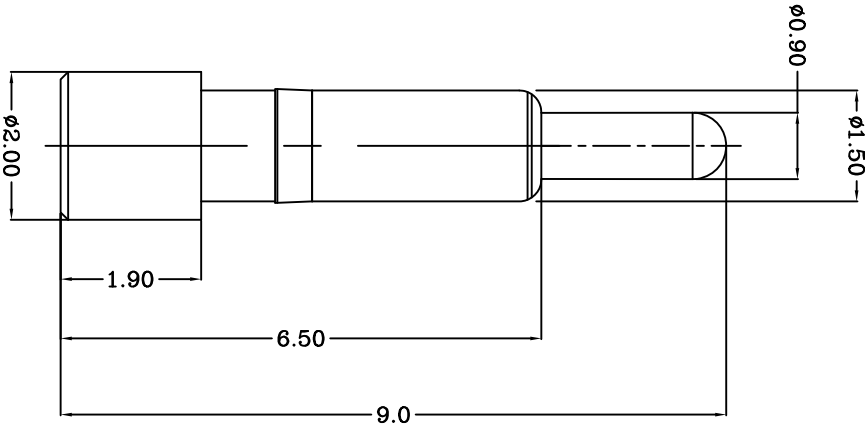

- Notes:
- Material(材质):
- 1) Body: C36000
 - 2) Fungel: C36000 or C27000
 - 3) Spring: Stainless steel wire
- 2 Plating(电镀):
- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2) Fungel: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3 Mechanical(机械性能):
- 1) Force: 115±30gf per pin at 1.4mm stroke (力: 下压1.4mm的力: 115±30gf)
 - 2) Total stroke(总行程): 2.30mm
 - 3) Life(寿命): 10,000 cycle min.
- 4 Electrical(电性能)
- 1) Contact resistance(接触阻抗): 30mOhm Max.
 - 2) Voltage rating(额定电压): 36V DC Max
 - 3) Current rating(额定电流): 2.0A

NEW		8009/11/08
REVISION		
RECORD		
APVD		
DATE		

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 3.2/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN		APVD	
CHK		REL	
NAME	PGGD PIN		
SCALE	1:1	A4	DWG NO.
			C-101148
			PG-2.0-1.9-1.5-6.5-9.0
			Top-Link Electronics Ltd.
			101148-1
			PART NUMBER

USED ON

-