



DWG NO.
C-101177

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC
-
DIST
-

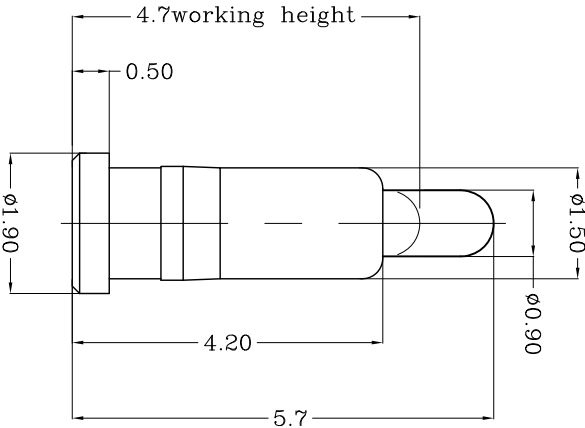

TOP-LINK

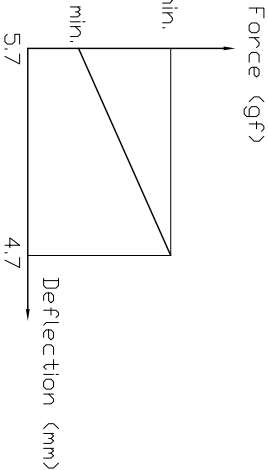

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
- 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
- 2)Plunger: Min 0.5um Gold plating over min. 2.5um Nickle plating
- 3 Mechanical
- 1)Total stroke : 1.5mm
- 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

USED DN

-

DIMENSIONS IN MM				MATL		HT TR		FIN	
TOLERANCES UNLESS				1		—		—	
OTHER SPECIFIED								A	
0 = ±				DWN		APVD		Top-Link	
0.0 = ±0.15				CHK		Lansing		Top-Link	
0.00 = ±0.10				Jim		REL		Electronics Ltd.	
0.000 = ±				NAME		POGO PIN			
ANGLE: ±1°				SCALE		PG-1.9-0.5-1.5-4.2-5.7			
SURF TEXTURE: 32/				1:1		A4			
REMOVE BURRS, BREAK				DWG		ND			
SHARP EDGES R0.05 MAX				C-101177					
DO NOT SCALE PRINT				SHEET		1 OF 1		REV	
								A	

101177-1

PART NUMBER

A

B

C

D

4

3

2

1