


DWG NO. C-101209

	NEW		2008/05/23
LTR	REVISION RECORD	APVD	DATE

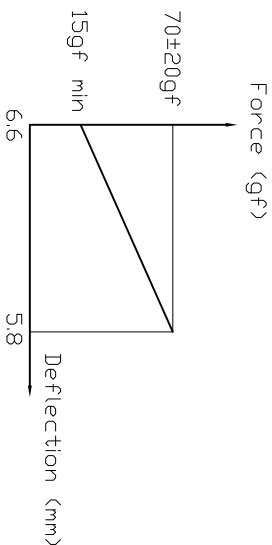

Material: Δ

or CuZn₃₉ PB3 or CuZn₃₈ PB2.

2) Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating

3 Mechanical

1) Total stroke : 1.5mm

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATERIAL		HT TR		FIN	
0 = ±				DWN				— ✓	
0.0 = ±0.15				qin		APVD		Top-Link	
0.00 = ±0.10				CHK		Lansing		Electronics Ltd.	
0.000 = ±				Jim		REL		Top-Link Electronics	
ANGLE: ±1°									
SURF TEXTURE: 32/				NAME					
REMOVE BURRS, BREAK SHARP EDGES, R0.05 MAX				PGGD PIN Customer Drawing					
DO NOT SCALE PRINT				SCALE		DWG NO.		SHEET	
				1:1		A4		C-101209	
						1 OF 1		REV A	

101209-1
PART NUMBER

USED ON