




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101217

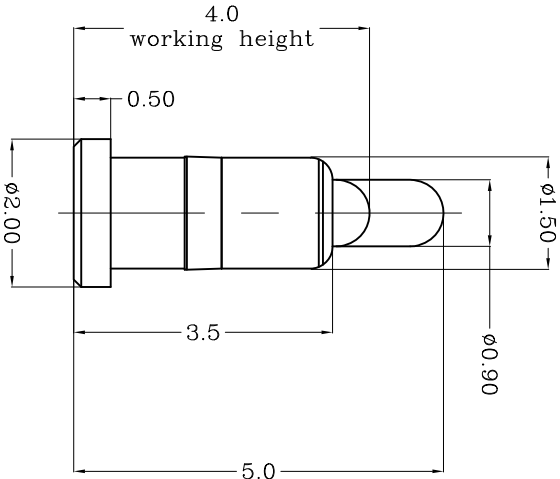

TOP-LINK

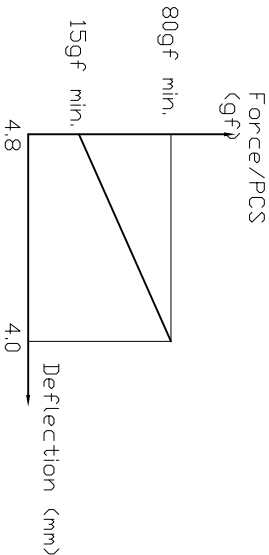

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38, PB2 or CuZn36(C2700).

2)Spring : Stainless steel wire

2)Plating

1)Body: 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: 0.4um Gold plating over min. 1.4um Nickle plating

3)Mechanical

1)Total stroke : 1.4mm

2)Durability: 10,000 cycle min.

4)Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

USED ON

-

101217-1

PART NUMBER

MATL	HT TR	FIN
	—	— 

DWN	APVD	
Jim	Lansing	
CHK	REL	

NAME	POGO PIN	
Andy	PG-2.0-0.5-1.5-3.5-5.0	

SCALE	A4	DWG NO.	C-101217	SHEET	1 OF 1	REV	A
1:1							

DIMENSIONS IN MM		REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT
TOLERANCES UNLESS OTHER SPECIFIED		
0	= ± -	
0.0	= ±0.15	
0.00	= ± 0.10	
0.000	= ±	
ANGLE: ±1°		
SURF. TEXTURE: 3.2/		

new		DATE	08/03/28
REVISION	APVD	RECORD	LTR

LDC	-
DIST	-

4

3

2

1