



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101268

LDC
-
DIST
-

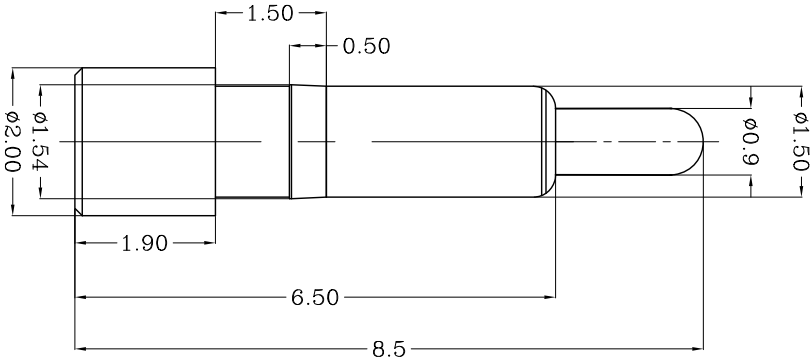

TOP-LINK

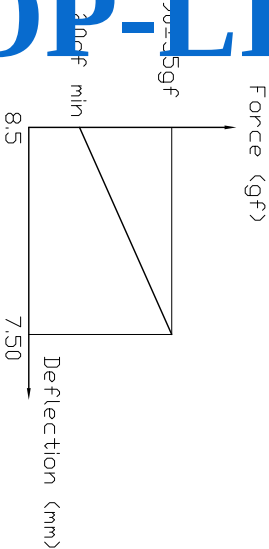

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

3 Mechanical

1)Total stroke : 1.8mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±-			0.0	= ±0.15		
0.00	= ±0.10			0.00	= ±0.10		
0.000	= ±-						
ANGLE: ±1°				SURF TEXTURE: 32/ V			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				DO NOT SCALE PRINT			
MATL		HT TR	—	FIN	— V		
DWN		APVD		<i>Top-Link Electronics</i> Top-Link Electronics L.td.			
QIN		REL					
CHK							
NAME		POGO PIN					
		PG-2.0-1.9-1.5-6.5-8.5					
SCALE	A4	DWG NO.	C-101268		SHEET 1 OF 1	REV A	
1:1							