


DWG NO.
C-101277

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

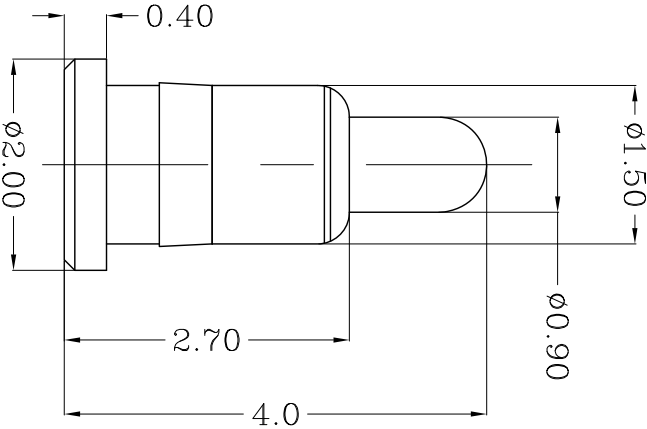

Notes:
△ Material(材质):

- 1)Body : Brass
- 2)Plunge : Brass
- 3)Spring : Stainless steel wire
- 2 Plating(电镀):

- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um 镍底1.4um Min)
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um 镍底1.4um Min)
- 3 Mechanical(机械性能):

- 1)Force: Min 85gf per pin at 0.80mm stroke (力: 下压0.80mm 力: 85±20gf)
- 2)Total stroke(总行程) : 1.00mm
- 3)Durability(寿命): 10,000 cycle min.
- 4 Electrical(电性能):
- 1)Contact resistance(接触阻抗): 30mOhm Max.
- 2)Voltage rating(额定电压): 36V DC Max
- 3)Current rating(额定电流): 3.0A

TOP LINK

USED ON

101277-1

PART NUMBER

LDC
-
DIST
-

更新	2013/01/11	DIMENSIONS IN MM		MATL	△ 1	HT TR	—	FIN	— √
更新	2011/03/07	TOLERANCES UNLESS OTHER SPECIFIED		DWN	Qin	APVD			Top-Link Electronics
NEW		0 = ± -		CHK		REL			Top-Link Electronics Ltd.
	2008/10/13	0.0 = ± 0.15							
		0.000 = ±							
		ANGLE: ±1°							
		SURF TEXTURE: 32/		NAME					
		REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX		SCALE	1:1	A4	DWG NO.	PGGD PIN	PG-2.0-0.4-1.5-2.7-4.0
		DO NOT SCALE PRINT							
LTR	REVISION RECORD	APVD	DATE						

4

3

2

1