



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101284

LDC
-
DIST
-

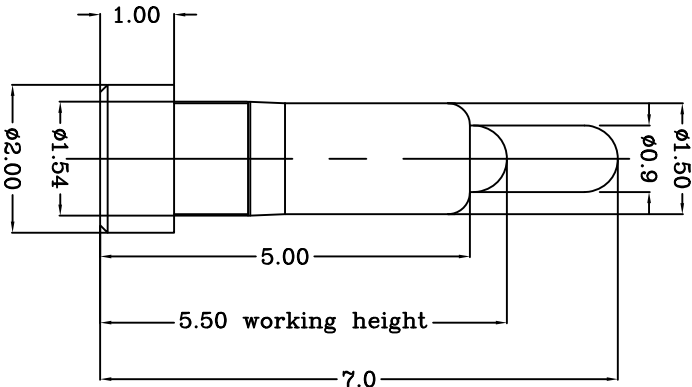

TOP-LINK

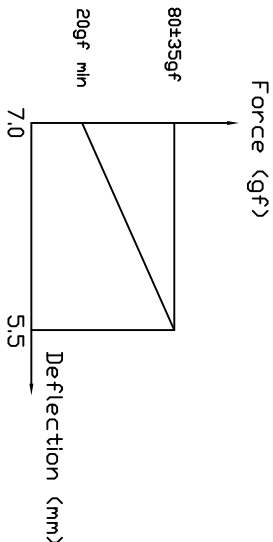

Notes:

- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
2)Spring : Stainless steel wire
2 Plating
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
3 Mechanical
1)Total stroke : 2.0mm
2)Durability: 10,000 cycle min.
4 Electrical
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC

NEW		8008/10/82
REVISION		
RECORD		
APVD		
DATE		

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ± -		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN		APVD	
QIN		Lansing	
CHK		REL	
Jin			
NAME	POGO PIN		
SCALE	1:1	A4	DWG NO.
			C-101284
			PG-2.0-1.0-1.5-5.0-7.0
			SHEET 1 OF 1
			REV A

101284-1
PART NUMBER

USED ON

-