


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101360


LDC	-
DIST	-

4

3

2

1

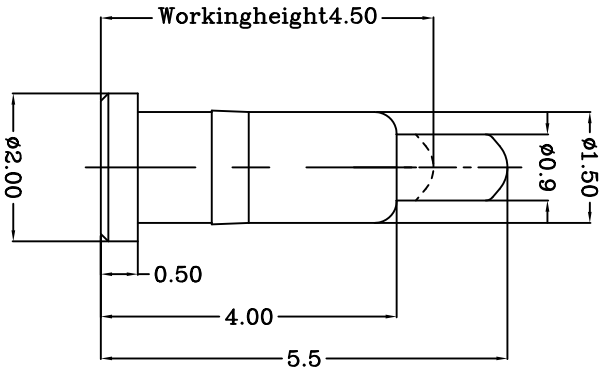

TOP-LINK

Notes:
Material(材质):

- 1)Body : C36000
- 2)Plunge : C36000 or C27000
- 3)Spring : Stainless steel wire
- 2 Plating(电镀):
 - 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3)Mechanical(机械性能):
 - 1)Force: 30±15gf per pin at 1.0mm stroke (力: 下压1.0mm的力: 30±15gf)
 - 2)Total stroke(总行程) : 1.40mm
 - 3)Durability(寿命): 10,000 cycle min.
- 4)Electrical(电性能)
 - 1)Contact resistance(接触阻抗): 30mOhm Max.
 - 2)Voltage rating(额定电压): 36V DC Max
 - 3)Current rating(额定电流): 2.0A

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -			0.0	= ±0.15		
0.00	= ±0.10			0.000	= ±		
ANGLE: ±1°							
SURF TEXTURE: 3.2/							
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX							
DO NOT SCALE PRINT							
NAME		PGGD PIN		PG-2.0-0.5-1.5-4.0-5.5			
SCALE	1:1	A4	DWG NO.	C-101360	SHEET	1 OF 1	REV B
MATL	1	HT TR	—	FIN	—	—	—
DWN	HE	APVD					
CHK	REL						
Top-Link Electronics				Top-Link Electronics Ltd.			

101360-1
PART NUMBER

USED ON
—