


LDC
-
DIST
-

	NEW		
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF. TEXTURE: 3.2/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	△	HT TR	FIN
DWN	QIN	APVD	REL
CHK			
PGGD PIN			
PG-2.0-0.4-1.5-2.7-3.8			
SCALE	A4	DWG	SHEET
1:1		NO.	1 OF 1
			REV
			A

101411-1
PART NUMBER

Top-Link
Electronics Ltd.

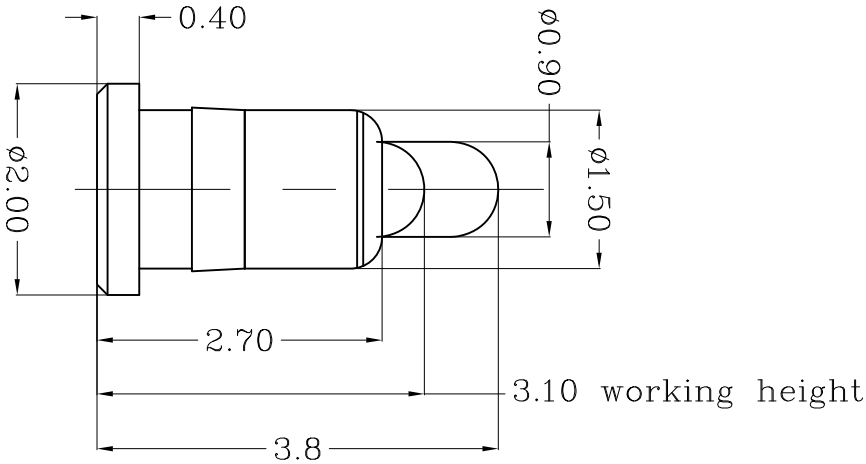

- Notes:
- △ Material (材质):
- 1) Body : Brass
- 2) Plating : Stainless steel wire
- 3) Plating (电镀):
- Min 0.1um Gold plating over min. 1.4um Nickel plating
- 1) Plunger: 镀金0.1um Min 镍底1.4um Min)
- 2) Plunger: 镀金0.4um Gold plating over min. 1.4um Nickel plating
- (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3) Plunger: 镀金0.4um Min 镍底1.4um Min)
- 4) Force: Min 70gf per pin at 0.7mm stroke
- (力: 下压0.70mm的力: Min 70gf)
- 5) Total stroke (总行程): 1.00mm
- 6) Reliability (寿命): 10,000 cycle min.
- 7) Electrical (电性能)
- 8) Contact resistance (接触阻抗): 30mOhm Max.
- 9) Voltage rating (额定电压): 36V DC Max
- 10) Current rating (额定电流): 2.0A