



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
101460

USED ON
-

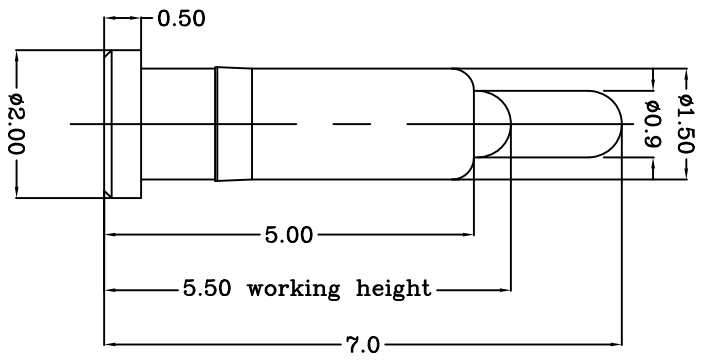

Notes:
ΔMaterial(材质):

- 1)Body : Brass
 - 2)Plunger : Brass
 - 3)Spring : stainless steel wire
- 2 Plating(电镀):
- 1)Body: Min. 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀0.1um Min 镍底1.4um Min)
 - 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀0.4um Min 镍底1.4um Min)
- 3 Mechanical(机械性能):
- 1)Force: 80±3.5gf per pin at 1.5mm stroke (力: 下压1.5mm 的力: 80±35gf)
 - 2)Total stroke(总行程) : 1.90mm
 - 3)Durability(寿命): 10,000 cycle min.
 - 4 Electric(电性能)
- 1)Contact resistance(接触阻抗): 30mOhm Max.
- 2)Voltage rating(额定电压): 36V DC Max
- 3)Current rating(额定电流): 2.0A

TOP LINK

LDC	-
DIST	-

	NEW		2010/10/21
L TR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±-			0.0	= ±0.15		
0.00	= ±0.10			0.000	= ±-		
ANGLE: ±1°				SURF TEXTURE: 3.2/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				DD NOT SCALE PRINT			
NAME		PGGD PIN		SCALE		1:1	
PG-2.0-0.5-1.5-5.0-7.0		DWG		A4		C-101460	
REL		APVD		A4		SHEET 1 OF 1	
CHK		REL		A4		REV A	
MATERIAL		HT TR		FIN		PART NUMBER	
DWN		APVD		FIN		101460-1	
QIN		REL		FIN		Top-Link Electronics Ltd.	

4

3

2

1