


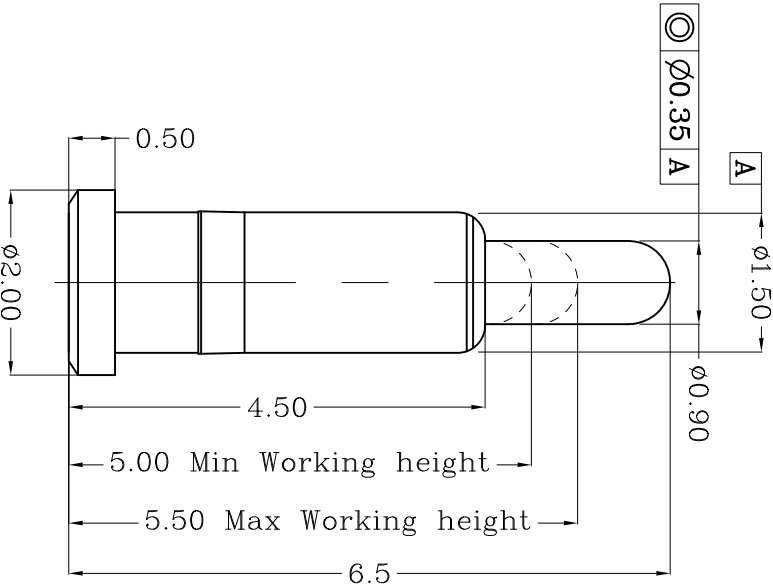

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
max working height	5.50mm	80gf min <2.1>
min working height	5.00mm	200gf Max
Durability	10000cycle	

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2> Warning: Working height are not permitted to be less than 5.00 min working height.
- 3 Electrical performance
- test distance: 30mOhm Max.
- Current rating: 2.0A
- 4 RoHS compliant.

TOP-LINK

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin zuozhong	APVD:		<u>Top-Link Electronics</u> Top-Link Electronics Ltd.
0.0 = ± 0.15		CHK:		REL:		
0.00 = ± 0.10						
0.000 = ± 0.005						
Angle: ±1°						
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX/DO NOT SCALE PRINT.						
Name POGO PIN						
Scale	Size	DWG No.			Page	Rev.
1:1	A4	C-101519			1/1	1

DIST

Rev.	NEW	2011/08/13
Revision record.		Date.