



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101603

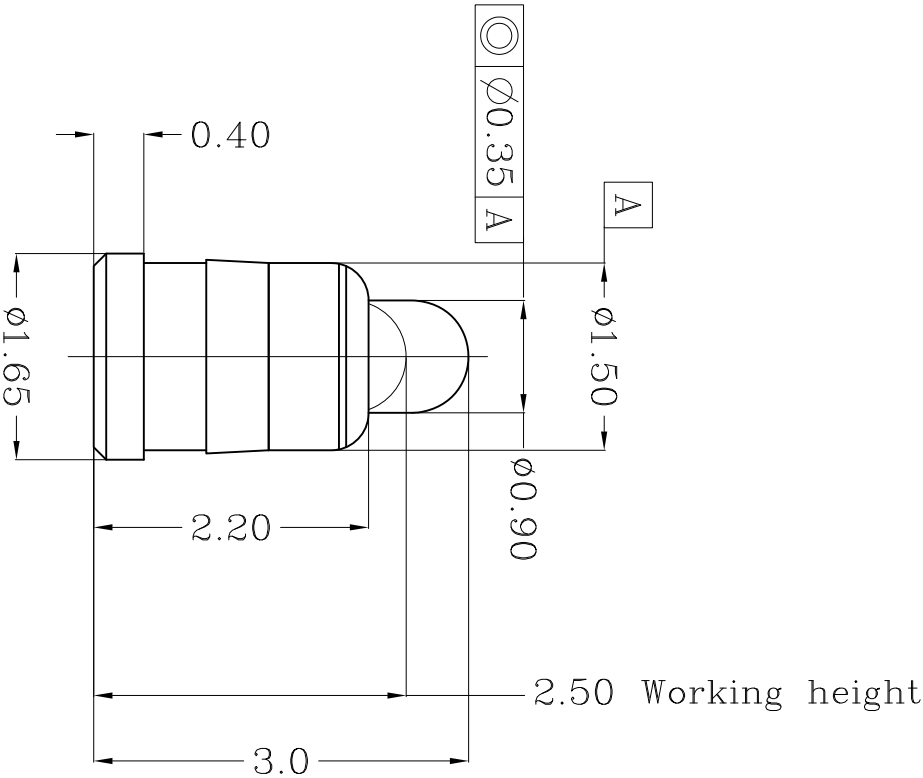

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
Resistance: 30mOhm Max.Current rating: 2.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

Table 1 Mechanical performance

Working height	2.50mm	90gf min <2.1>
Durability	10000cycle	

Item	Part name	Qty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um min over Ni 1.4um min
2	Plunger	1	Leaded Brass	Au 0.1um min over Ni 1.4um min
3	Spring	1	Stainless steel wire	_____
4	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____
5				

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm			
0.0 = ±0.15		DWN:	APVD:	101603-1		
0.00 = ±0.10		CHK:	REL:	Top-Link Electronics Ltd.		
0.000 = ±0.05						
Angle: ±1°						
SURF. TEXTURE:						
REMOVE BURRS.						
BREAK SHARP EDGES						
R0.05 MAX.DD NOT						
SCALE PRINT.						
Name		Customer drawing				
Scale		Size	DWG No.	Page	Rev.	
1:1		A4	C-101603	1/1	1	

4

3

2

1