



proposal

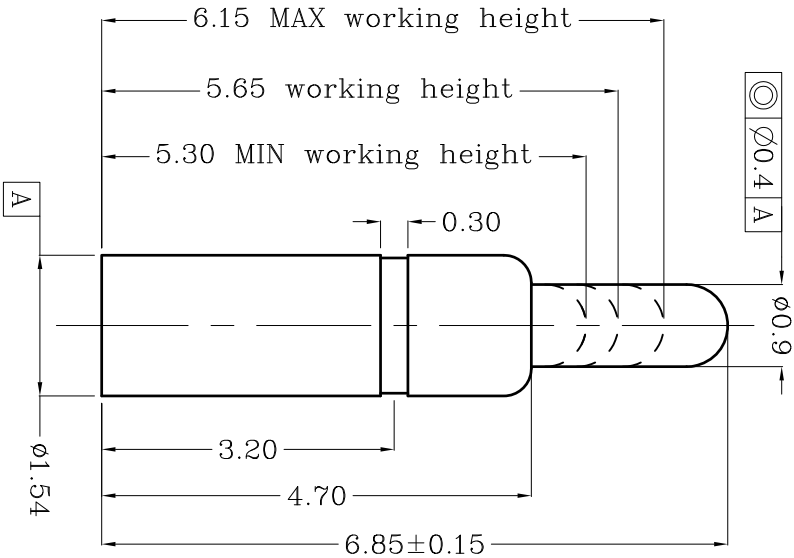


Table 1 Mechanical performance

Working height	5.65mm	100±20gf <2.1>
Durability	10,000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 Warning: Working height are not permitted to be less than min working height.
- 3 Electrical performance
- Resistance: 30mOhm Max.
- Current rating: 2.0A
- 4 RoHS compliant.

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Rev.	Revision record.	Date.
1	NEW	2013/03/29
2	Update	2013/04/08

Top-Link Electronics Ltd.	Type	Unit	Weight	PART NUMBER
TOLERANCES UNLESS OTHER SPECIFIED	Customer drawing	mm		101724-1
0.0 = ±0.15	DWN: Cai wanlu	APVD:		
0.00 = ±0.10	CHK: REL:			
0.000 = ±0.05	Name POGO PIN	DWG No.	C-101724	Page 1/1
Angle: ±1°				Rev. 2
SURF. TEXTURE: REMOVE BURRS.				
BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.				

Top-Link Electronics Ltd.