


DWG NO.
C-101180

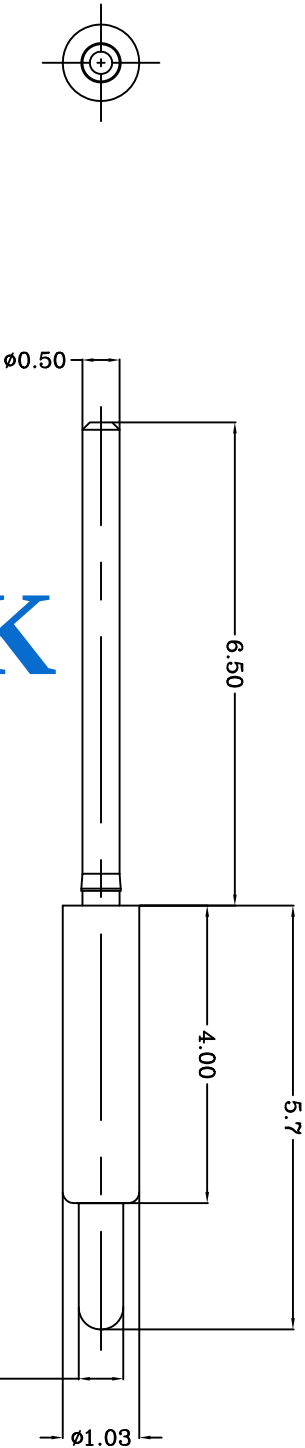

Notes:
Material:

- 1)Plunger & Body : CuZn36 Pb3, HO2 (C36000) or CuZn39 PB3 or CuZn38 PB2 or CuZn36(C2700).
- 2)Spring : Stainless steel wire
- 2 Plating
 - 1)Body: 0.1um Gold plating over 1.4um Nickle plating
 - 2)Plunger: 0.5um Gold plating over 1.4um Nickle plating
 - 3 Mechanical
 - 1)Durability: 10,000 cycle min.
 - 2)Spring Force: 115±25gf at 1.0mm stroke.
 - 4 Electrical
 - 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC Max.

TOP-LINK

USED ON

-

LDC
-
DIST
-

FILE		DATE
LTR	REVISION	APVD
	RECORD	DATE

DIMENSIONS IN MM				TOLERANCES UNLESS			
OTHER SPECIFIED				0			
0.0				= ±			
0.00				= ±0.15			
0.000				= ±0.10			
ANGLE: ±1°				SURF TEXTURE: 32/			
REMOVE BURRS, BREAK				SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT				SCALE			
1:1				A4			
DWG				NO.			
C-101180				PGGD PIN			
PG-0.5-6.5-1.03-4.0-5.7				SHEET			
1 OF 1				REV			
1				1			

PART NUMBER

101180-1

A

B

C

D

4

3

2

1