



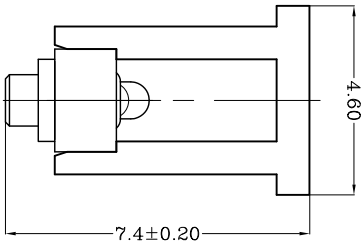
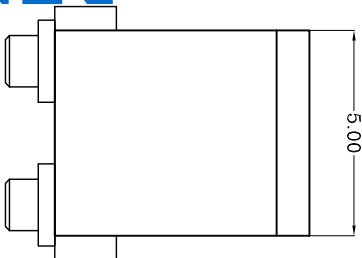


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

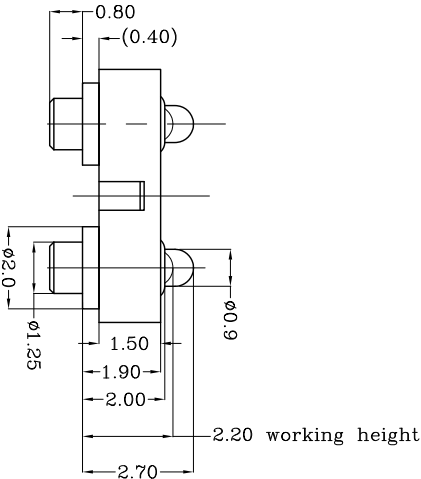

DWG NO.
C-100293



Recommended PCB Layout

TOP-LINK

USED ON
-

100293-2

PART NUMBER

A

B

C

D

Notes:
1 Material, Housing: PA 4/6 (30% Glass Filled)
Color: Black.
Contact: Brass
2 Mechanical demands:
Plating Plunger: Min. 0.4um Au over 14um Ni
Plating Body: Min. 0.1um Au over 14um Ni
Spring Force: 108±22 gf.

LDC
-
DIST
-

	变更高度			09/02/04
	NEW			08/03/19
LTR	REVISION	APVD	DATE	
	RECORD			

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				
0	= ± -			
0.0	= ± 0.15			
0.00	= ± 0.10			
0.000	= ± -			
SURF TEXTURE: 32/				
ANGLE: ±1°				
REMOVE BURRS, BREAK				
SHARP EDGES R0.05 MAX				
DO NOT SCALE PRINT				
MATL	1	HT TR	FIN	
DWN	Jim	APVD	Lansing	
CHK	Andy	REL	Top-Link Electronics	Top-Link Electronics Ltd.
NAME BATTERY POGO CONNECTOR 2 POSITIONS				
SCALE	A4	DWG	PGC-15-2.7-R-2P-35PH	
1:1		NO.	C-100293	
SHEET	1 OF 1	REV	B	

4

3

2

1