

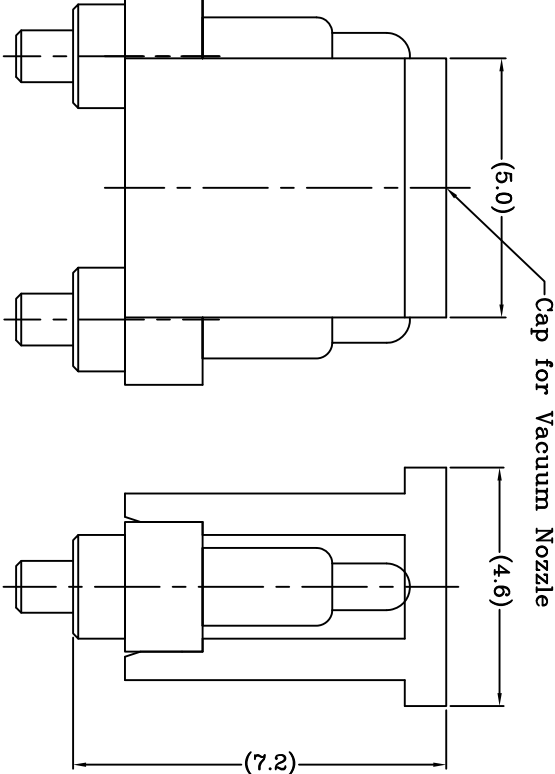


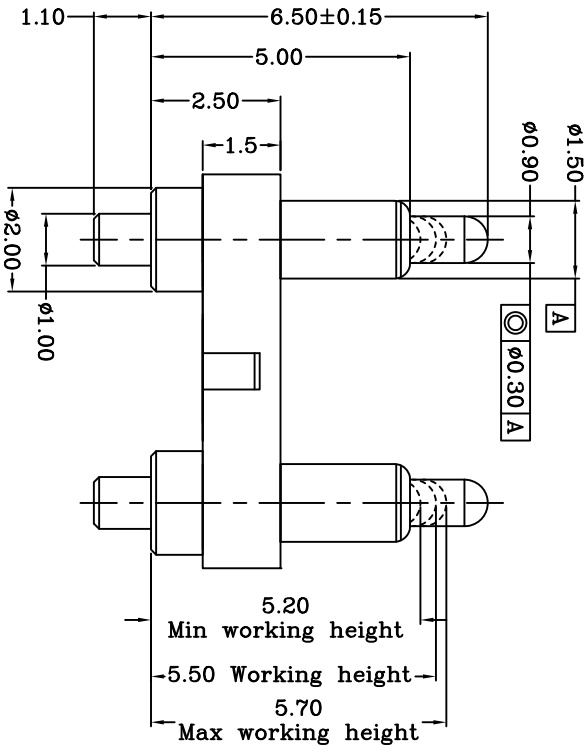

proposal

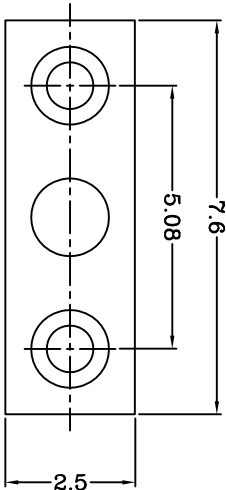

Item	Part name	Q'ty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Min Au 0.1um over min Ni 1.4um
3	Plunger	2	Leaded Brass	Min Au 0.4um over min Ni 1.4um
4	Spring	2	Stainless steel wire	_____
5	CAP	1	High temp.Plastic	_____

TOP-LINK

Table 1 Mechanical performance

Working height	5.50mm	125±30gf
Durability	10000cycle	

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2>Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
 - 4 Packaging specification conforms to EIA 481
 - 5 RoHS compliant.

Top-Link Electronics Ltd.		Type	Unit	Weight
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm	_____
0.0 = ±0.15	DWN:	APVD:	10101021571 PART NUMBER	
0.00 = ±0.10	Cai wanlu	REL:		
0.000 = ±0.005	CHK:	REL:	Top-Link Electronics Electronics Ltd.	
Angle: ±1°	NAME	Customer drawing		
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.D0 NOT SCALE PRINT.	Scale	Size	DWG No.	Page
	1:1	A4	C-10101021571	1/1

DIST

DIST

1	NEW	2016/02/19
Rev.	Revision record.	Date.