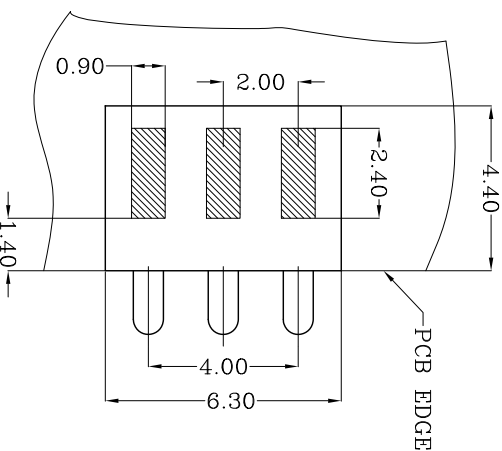

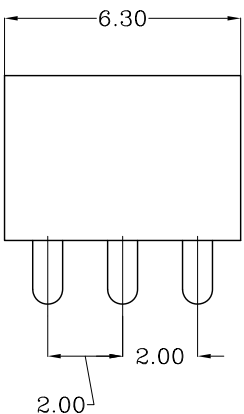



Recommended PCB Layout & Application

10001-3

PART NUMBER

Notes:

1) Material (材質):
Housing: LCP Color Black.
Contact: Brass
Spring : Stainless steel wire

2 Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 鍍金0.1um Min 鍍底1.4um Min)
2)Punger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Punger: 鍍金0.4um Min 鍍底1.4um Min)



3 Mechanical:
Spring force: Min 0.2N with 0.3mm stroke

1.1 +0.3UN/-0.2UN with 1.0mm stroke
Total stroke(总行程): 1.40mm
Durability(寿命): 10,000 cycle min.

LDC	-
DIST	-

	變更材質		2010/05/12
	改BODY 結構		2010/01/25
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL		HT TR	—	FIN	
0 = ±	0.0 = ±0.15	DWN	APVD		Top-Link Electronics Ltd.		
0.00 = ±0.10	0.000 = ±	CHK	REL		Top-Link Electronics		
ANGLE: ±1°							
SURF TEXTURE: 3.2/ 		NAME BATTERY POGO CONNECTOR 3 POSITIONS RIGHT ANGLE					
REMOVE BURRS, BREAK SHARP EDGES P0.05 MAX	DO NOT SCALE PRINT	SCALE	A4	DWG NO.	C-1000001	SHEET 1 OF 1	REV F