
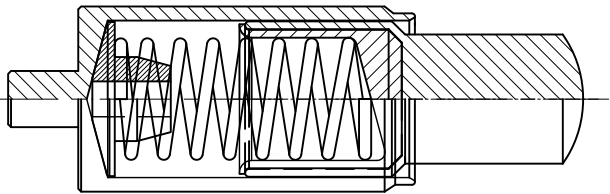



LDC
-
DIST
-

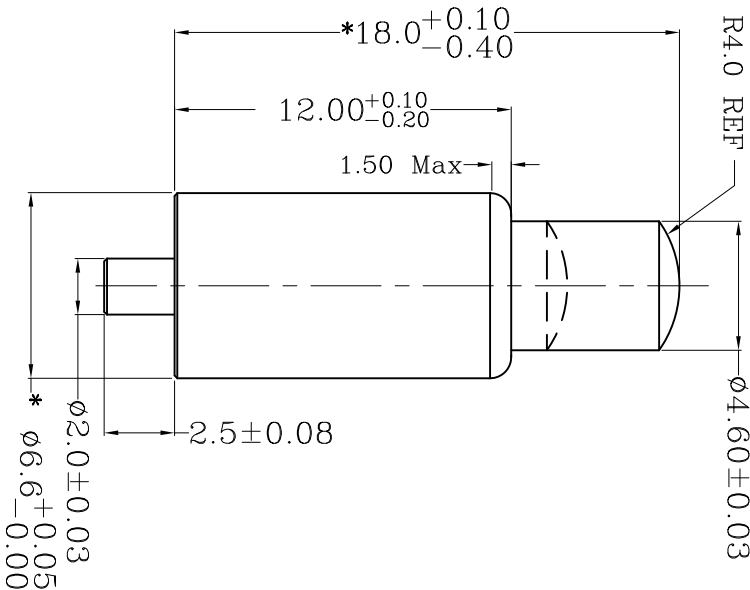

TOP-LINK

LTR	NEW	REVISION RECORD	APVD	DATE
-	-	-	-	2010/11/03

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN	APVD		
CHK	REL		
NAME			
PGGD PIN			
PG-2.0-2.5-6.6-12.0-4.60-18.0			
SCALE	A4	DWG NO.	C-101463
1:1			
SHEET			
1 OF 1			
REV			
A			

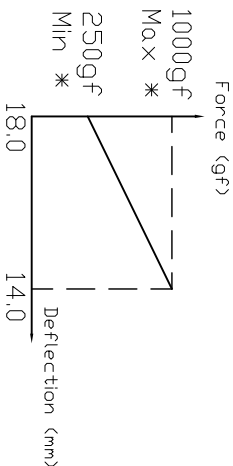

- Notes:
- Material:
 - Plunger & Body : Brass C3604
 - Spring : Stainless steel wire
 - Wedge and spring holder: LCP (L304G35)
 - Plating
 - Body Min 0.125um Au over 1.4um Nickel plating
 - Plunger Min 0.4um Au over 1.4um Nickel plating
 - Mechanical
 - Total stroke : 4.0+0.5mm
 - Durability: 10,000 cycle min.
 - Electrical
 - Contact resistance: 20 mΩ max
 - Rate voltage & Current: 12V DC 5A