

TOP-LINK

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

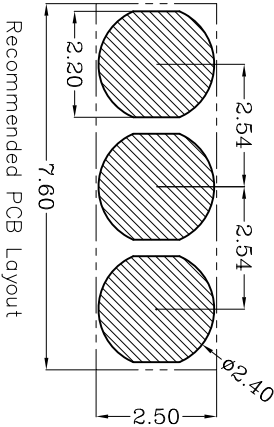


Table 1 Mechanical performance			
Max.working height	4.20mm	80±20gf <3.1>	
Min.working height	3.70mm	110±30gf	
Durability	10000cycle		

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - 3 <3.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - 4 <3.2>Warning:Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
 - Resistance:30mOhm Max.Current rating: 2.0A
 - 4 Packaging Spec.Comformance to EIA 481
 - 5 RoHS compliant.

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm		100453-3	
0.0	±0.15	DWN:	APVD:			
0.00	±0.10	CHK:	REL:			
0.000	±0.05	Angle:				
SURF. TEXTURE:		Name	Customer drawing	PGC-1.5-5.0-R-3P-2.54PH		
REMOVE BURRS.		Scale	Size	DWG No.	Page	Rev.
BREAK SHARP EDGES		1:1	A4	C-100453	1/1	B
R0.05 MAX. DO NOT SCALE PRINT.						

DIST

Renewal	2011/06/07
NEW	2008/12/22
Revision record.	Date.