



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101462

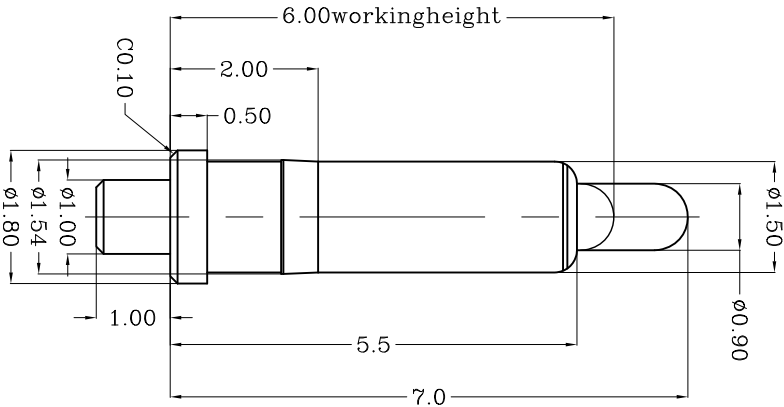

- Notes:
- Material(材质):
1)Body : Brass
2)Plunger : Brass
3)Spring : Stainless steel wire
4)Plating(电镀):
1)Bobby: Min 0.1um Gold plating over min. 1.4um Nickel plating
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)
3)Mechanical(机械性能):
1)Force: Min 90gf per pin at 1.0mm (力:1.0mm 的力:min 90gf)
2)Total stroke(总行程) : 1.40mm
3)Durability(寿命): 10,000 cycle min.
4)Electrical(电性能)
1)Contact resistance(接触抵抗): 30mOhm Max.
2)Voltage rating(额定电压): 36V DC Max
3)Current rating(额定电流): 2.0A

LDC	-
DIST	-

NEW			8010/10/03
REVISION			
RECORD			
APVD			
DATE			

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±	-		0.0	= ±0.10		
0.00	= ±	0.05		0.000	= ±		
ANGLE: ±1°							
SURF TEXTURE: 32/							
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX							
DO NOT SCALE PRINT							
NAME		POGO PIN		PG-1.0-1.0-1.8-0.5-1.5-5.5-7.0			
SCALE	1:1	A4	DWG NO.	C-101462	SHEET 1 OF 1		
MATL	△	HT TR	—	FIN	—	△	
DWN	Qin	APVD					
CHK		REL					
Top-Link Electronics Ltd.				Top-Link Electronics Ltd.			

101462-1
PART NUMBER

USED ON
—